


Block POLYG

The POLYG block interpolates a polygon of points defined through the parameters.

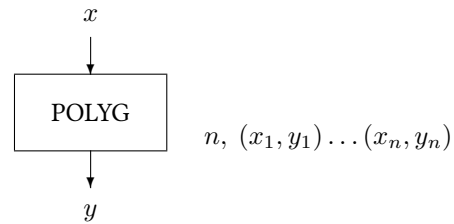

Name	POLYG
Function	fb0019
Inputs	1
Outputs	1
Parameters	3 ... [7001]
Strings	0
Group	S

Inputs

- | | |
|---|----------------|
| 1 | Any signal x |
|---|----------------|

Outputs

- | | |
|---|---------------------------|
| 1 | Interpolated value $y(x)$ |
|---|---------------------------|

Parameters

- | | |
|----------|---|
| 1 | Number of given points, $2 \leq n \leq 3500$ |
| 2 | x -coordinate of 1 st point, x_1 |
| 3 | y -coordinate of 1 st point, y_1 |
| 4 | x -coordinate of 2 nd point, x_2 |
| 5 | y -coordinate of 2 nd point, y_2 |
| ... | |
| $2n$ | x -coordinate of n^{th} point, x_n |
| $2n + 1$ | y -coordinate of n^{th} point, y_n |

Strings

None

Description The x -coordinates $x_1 \dots x_n$ must either be strictly increasing, i. e., $x_1 < x_2 \dots < x_n$ or strictly decreasing, $x_1 > x_2 \dots > x_n$. The output signal y is calculated from the input x according to

$$y = \begin{cases} y_1 & \text{if } x < x_1 \\ y_i + (x - x_i)(y_{i+1} - y_i)/(x_{i+1} - x_i) & \text{if } x_i \leq x < x_{i+1} \\ y_n & \text{if } x_n < x \end{cases}$$

for the case of increasing x values and correspondingly for decreasing x values.


polyg.vseit



A **DO** block delivers values from 0 to 10 in steps of 0.1. The **POLYG** block interpolates as specified by the block parameters

```
4
1 2.5
3 1.7
5 1.5
9 2
```

The **PLOT** block displays the graph.

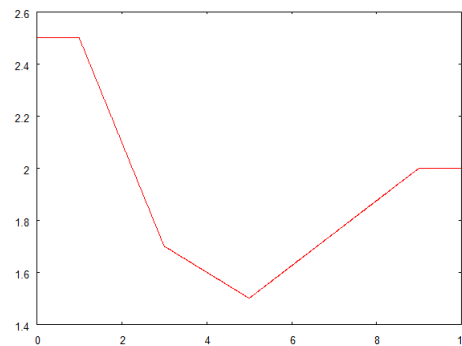

Please observe how the **POLYG** block keeps the output constant for data out of the specified parameter range.